

[HNL-206T CP]
1.5" CP combination fog nozzle



1.5" (38mm) Brass, chrome plated combination fog nozzle with bumper. The HNL-206T CP is UL / ULC Listed and FM Approved and adjusts from straight stream to fog to shutoff. The HNL-206T CP has a rated operation pressure up to 100 psi and is used in most industrial applications, including hose rack and reel assemblies. Specify regional hose thread.


FINISH: Chrome

OPTIONS: Brass

HOSE THREADS AVAILABLE: NPSH and NST



Dimensions:

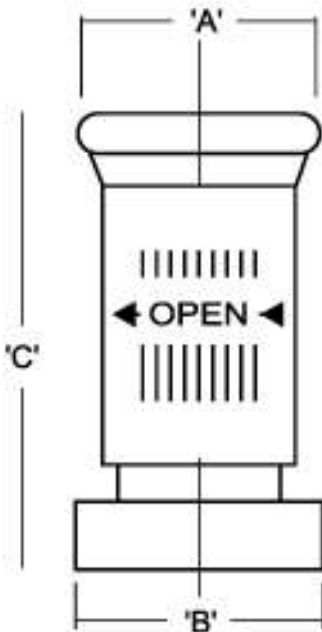

A = 2.45" (62mm)
B = Subject to thread
C = 4.8" (122mm) Closed

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	