

## [IE2600-25-SG-SS]

### 2-1/2" GROOVE X GROOVE FACTORY SET PRESSURE REDUCING INLINE VALVE WITH SUPERVISORY SWITCH



#### INFORMATION:

The Wilson and Cousins' **IE2600-25-SG-SS** Series feature a range of 2-1/2" Groove x Groove factory set pressure reducing inline (globe) valves with 8 different bonnets from Type 0 to Type 7. These brass valves are intended to serve as floor control valves, standpipe valves, or a checking device. Listed by Underwriters' Laboratories, the IE2600-25-SG-SS series can handle FLOW and NO-FLOW conditions, as required by NFPA for CLASS I and III systems, up to maximum inlet pressures of 400 PSI depending on valve type. 1/4" Tapped and plugged on both sides for pressure gauge at inlet and outlet.

The inclusion of a supervisory switch allows for external monitoring of the valves Open/Closed position.

Download our Valve Selection Guide from our "SUPPORT" page to find the recommended valve size/type for your application.

#### OPTIONS and FEATURES:

Chrome Plate Finish


#### OTHER CONNECTION OPTIONS:

Female NPT x Female NPT ; Inline (globe type) Body (-ST)

#### LISTED:



#### DIMENSIONS (approximate):

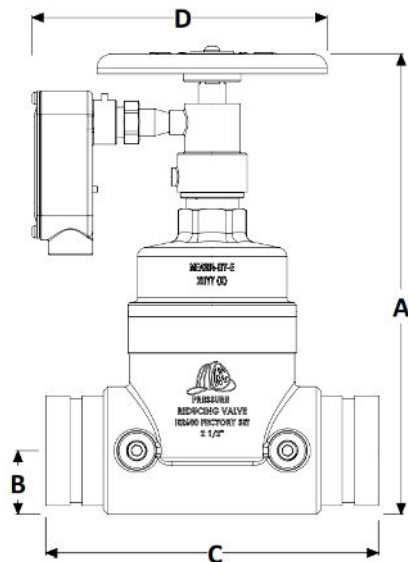

Dimension	Version 1 <input type="checkbox"/>		Version 2 <input type="checkbox"/>	
	Inch	mm	Inch	mm
A (OPEN)	11 3/4	298	12 3/4	324
A (CLOSED)	11 1/8	282	12	306
B	1 11/16	43	1 11/16	43
C	7 1/2	191	8 11/16	221
D	7 3/4	196	7 3/4	196

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	