

## [IE2600-25-ST]

### 2-1/2" FEMALE X FEMALE FACTORY SET PRESSURE REDUCING INLINE VALVE



#### INFORMATION:

The Wilson and Cousins' **IE2600-25-ST** Series feature a range of 2-1/2" Groove x Groove factory set pressure reducing inline (globe) valves with 8 different bonnets from Type 0 to Type 7. These brass valves are intended to serve as floor control valves, standpipe valves, or a checking device. Listed by Underwriters' Laboratories, the IE2600-25-ST series can handle FLOW and NO-FLOW conditions, as required by NFPA for CLASS I and III systems, up to maximum inlet pressures of 400 PSI depending on valve type. 1/4" Tapped and plugged on both sides for pressure gauge at inlet and outlet.

Download our Valve Selection Guide from our "SUPPORT" page to find the recommended valve size/type for your application.

#### OPTIONS and FEATURES:

Built in Supervisory Switch (Add suffix - SS)  
Chrome Plate Finish  
Specify Hose Thread


#### OTHER CONNECTION OPTIONS:

Groove x Groove; Inline (globe type) Body (-SG)

#### LISTED:



#### DIMENSIONS (approximate):

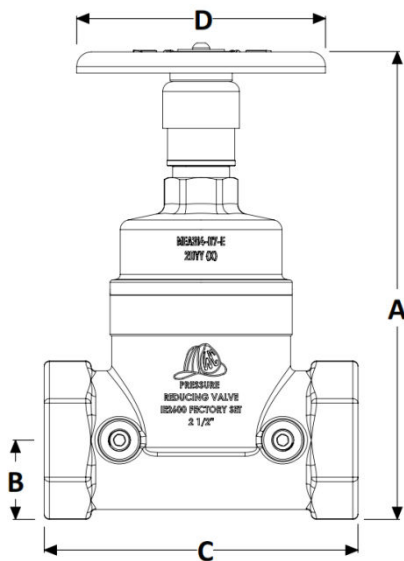

Dimension	Version 1 <input type="checkbox"/>		Version 2 <input type="checkbox"/>	
	Inch	mm	Inch	mm
A (OPEN)	11 13/16	300	11 5/16	287
A (CLOSED)	11 3/16	284	10 5/8	270
B	1 7/8	48	1 7/8	48
C	6 3/4	172	7 9/16	192
D	6 1/4	159	6	152

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	