

[IE36-WH BR]

4" x 2.5" x 2.5" Brass angle free-standing wall hydrant




4" (100mm) NPT x 2.5" (65mm) hose thread x 2.5" (65mm) hose thread, brass angle free-standing wall hydrant used as an auxilliary water supply by the fire service. The body is furnished with two F x M brass adapters to create 2.5" (65mm) hose thread outlets. The package also includes two caps and chains, a round "Wall Hydrant" escutcheon plate. Option for 18" polished brass sleeve. The IE36-WH BR provides 250 GPM per outlet. Specify regional hose thread. UL listed.

FINISH: Cast Brass

OPTIONS: Polish Brass, Cast Chrome or Polish Chrome

HOSE THREADS AVAILABLE FOR OUTLET: CSA, BCT, WCT, QST, NSST, NST, Pittsburgh, New York Corp., New York Fire Department and Detroit. Other threads see factory for availability.

Dimensions:

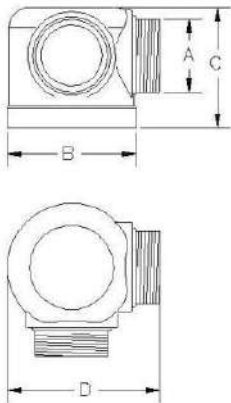

- A= 2 1/2" NPT
- B= 4" NPT
- C= 4.75" (120mm)
- D= 6" (152mm)



PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	