

[IE23G-BRASS]

2.5" Standard Angle Hose Valve. 2.5" Grooved Inlet x 2.5" Male Hose Thread Outlet.



Heavy Duty 2-1/2" (65 mm) brass, 300 lbs (2070 KPa) pressure tested approved angle hose valve. Lightweight cast brass body, Forgeline Bonnett and Seat Assembly. UL/ULC listed and FM Approved. Specify regional hose thread for outlet.

FINISH: Cast Brass


OPTIONS: Cast Chrome, Polish Brass, Polish Chrome

HOSE THREADS AVAILABLE: CSA, BCT, WCT, QST, NSST, NPSH, NST, Louisville, Cleveland, Chicago, Pittsburgh, New Cincinnati, New York Corp., New York Fire Department, Richmond, Raleigh

OTHER HOSE THREADS: PLEASE CONTACT FACTORY



Dimensions:

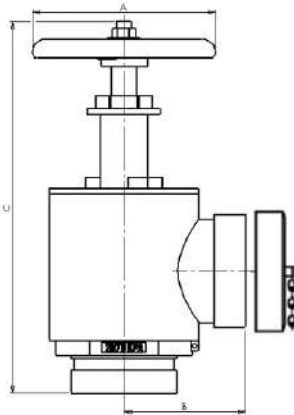

A=5" (125mm)
B=3 3/16" (79mm)
C=11.8" (OPEN) (300mm)
C=10.5" (CLOSED) (267mm)

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	