

**[ IE2600-25-FM ]**  
**2-1/2" Female x Male Factory Set Pressure Reducing Angle Valve**



**INFORMATION**

The Wilson and Cousins' **IE2600-25-FM** Series feature a range of 2-1/2" Female NPT by Male Hose Thread factory set pressure reducing angle valves. These brass valves are intended to serve as floor control valves, standpipe valves, or a checking device. Listed by Underwriters' Laboratories, the **IE2600-25-FM** series can handle FLOW and NO-FLOW conditions, as required by NFPA for CLASS I and III systems, up to maximum inlet pressures of 400 psi. Tapped and plugged holes (1/4") are standard on all bodies to allow for monitoring by external pressure gauges (supplied by others).

Download our Valve Selection Guide from our "SUPPORT" page, to find the recommended valve size for your application.

**OPTIONS**

Supervisory Switch (Add suffix -SS)  
Chrome Plate Finish  
Specify Hose Threads


**CONNECTION OPTIONS**

Female NPT x Female NPT; Angle (-FF)  
Female NPT x Female NPT; Inline (-ST)  
Groove x Male Hose; Angle (-GM)  
Groove x Groove; Angle (-GG)  
Groove x Groove; Inline (-SG)

**LISTED**



**Dimensions:**

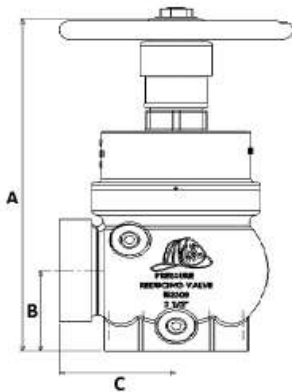

**A:** 11.13" (282 mm) **[OPEN]**  
**A:** 10.50" (266 mm) **[CLOSED]**  
**B:** 2.63" (67 mm)  
**C\*:** 3.54" (90 mm)  
**C\*\*:** 4.64" (118 mm)

\* Female x Male body

\*\* Female x Female body with Male hose adapter

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	