

**[ IE75 CP LEXAN ]**

**IE75 Chrome Swing Rack - 1.5" x 75' Rack Hose w/ Chromed Couplings and Lexan Nozzle**



**Description:**

Wilson and Cousins' UL/ULC Listed and FM Approved IE75 CP LEXAN chrome-plated semi-automatic swing rack assembly. This item is acceptable for Class II Service and acts as a readily available, immediate means of controlling and suppressing fire by an individual. The swing-able pin rack features an automatic release mechanism that prevents water from flowing through the hose when the valve is opened until the last fold has fallen off the rack, ensuring ease of use and proper functionality.

Standard rack assembly is equipped with 75' of 1.5" rack hose, finished with chrome plated couplings, a chrome finished lexan nozzle, a 1.5" x 3" (38mm x 76mm) steel nipple, and a locknut

**Finish:**

Chrome



**Optional Finish:**

Red Rack and Cast Brass Couplings/Nozzle

**Available Hose Threads:**

NPSH, NST

**Listed:**

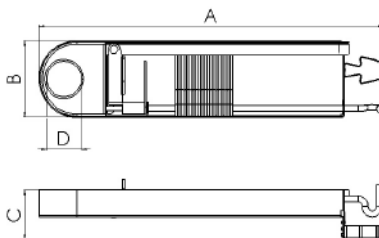

**DIMENSIONS:**

- A: 22.25" (565.25mm)
- B: 3.86" (98mm)
- C: 2.74" (69.5mm)
- D: 1.91" (48.4mm)

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	