

[HF325F]
POLISHED BRASS CHECK SNOOT (CLAPPER STYLE)
3" FNPT X 2-1/2" HOSE SWIVEL



INFORMATION:

3" (76mm) Female NPT x 2.5" (64mm) Female swivel hose thread, polished brass Check Snoot. The HF325F is used on multiple inlet fire department connections, enabling the connection of several fire department supply lines at one time. The HF325F is equipped with a brass clapper preventing the backflow of water through unused connections. A breakable cap or plug should be installed to protect the swivels and reduce the risk of foreign debris from entering the connection.

UL/ULC and FM approved; rated for 300 psi (2070 kPa).

FINISH: Polished Brass

OPTIONAL FINISH: Chrome Plated


Hose Threads Available: NST

Other Hose Threads: Please Contact

LISTED:



DIMENSIONS:

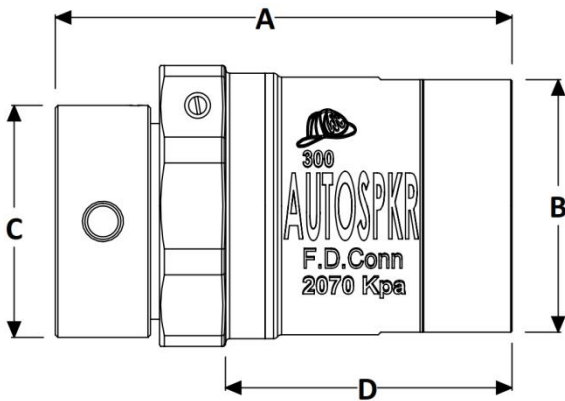

Dimension	Inch	mm
A	7	178
B	3" FEMALE NPT	
B (OD)	3-7/8	98
C	2-1/2" HOSE THREAD	
D	4-3/8	111

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	