



IE2600A-S-25-GG-SS

2.5" GRVD X 2.5" GRVD (BR) STRAIGHT ADJUSTABLE REGULATING VALVE W/ TAMPER SWITCH



INFORMATION:

The Wilson and Cousins' IE2600A-S-25-GG-SS, In-line (Adjustable Series) The IE2600A series Field Adjustable Valve 400 psi rated is controlled by a single spring in the bonnet.

The Spring allows for one type of valve to be installed and can be adjusted to meet the correct pressure reduction ratio required for their specific location. The inclusion of a Supervisory Switch allows for external monitoring of the valves Open/Closed position

Designers have the option to choose from a range of seven different spring settings for the 2.5" size valve, allowing one to satisfy all required inlet/outlet pressure values.

The Grooved Version of the IE2600A is limited for use within a sprinkler system and is not intended for connection to a fire hose.

OPTIONS:

Chrome Plate Finish
Specify Hose Thread


OTHER CONNECTION OPTIONS:

GROOVE X (M)REGIONAL HOSE THREAD
(F)NPT X (F)NPT
(F)NPT X (M)NST

LISTED:



DIMENSIONS:

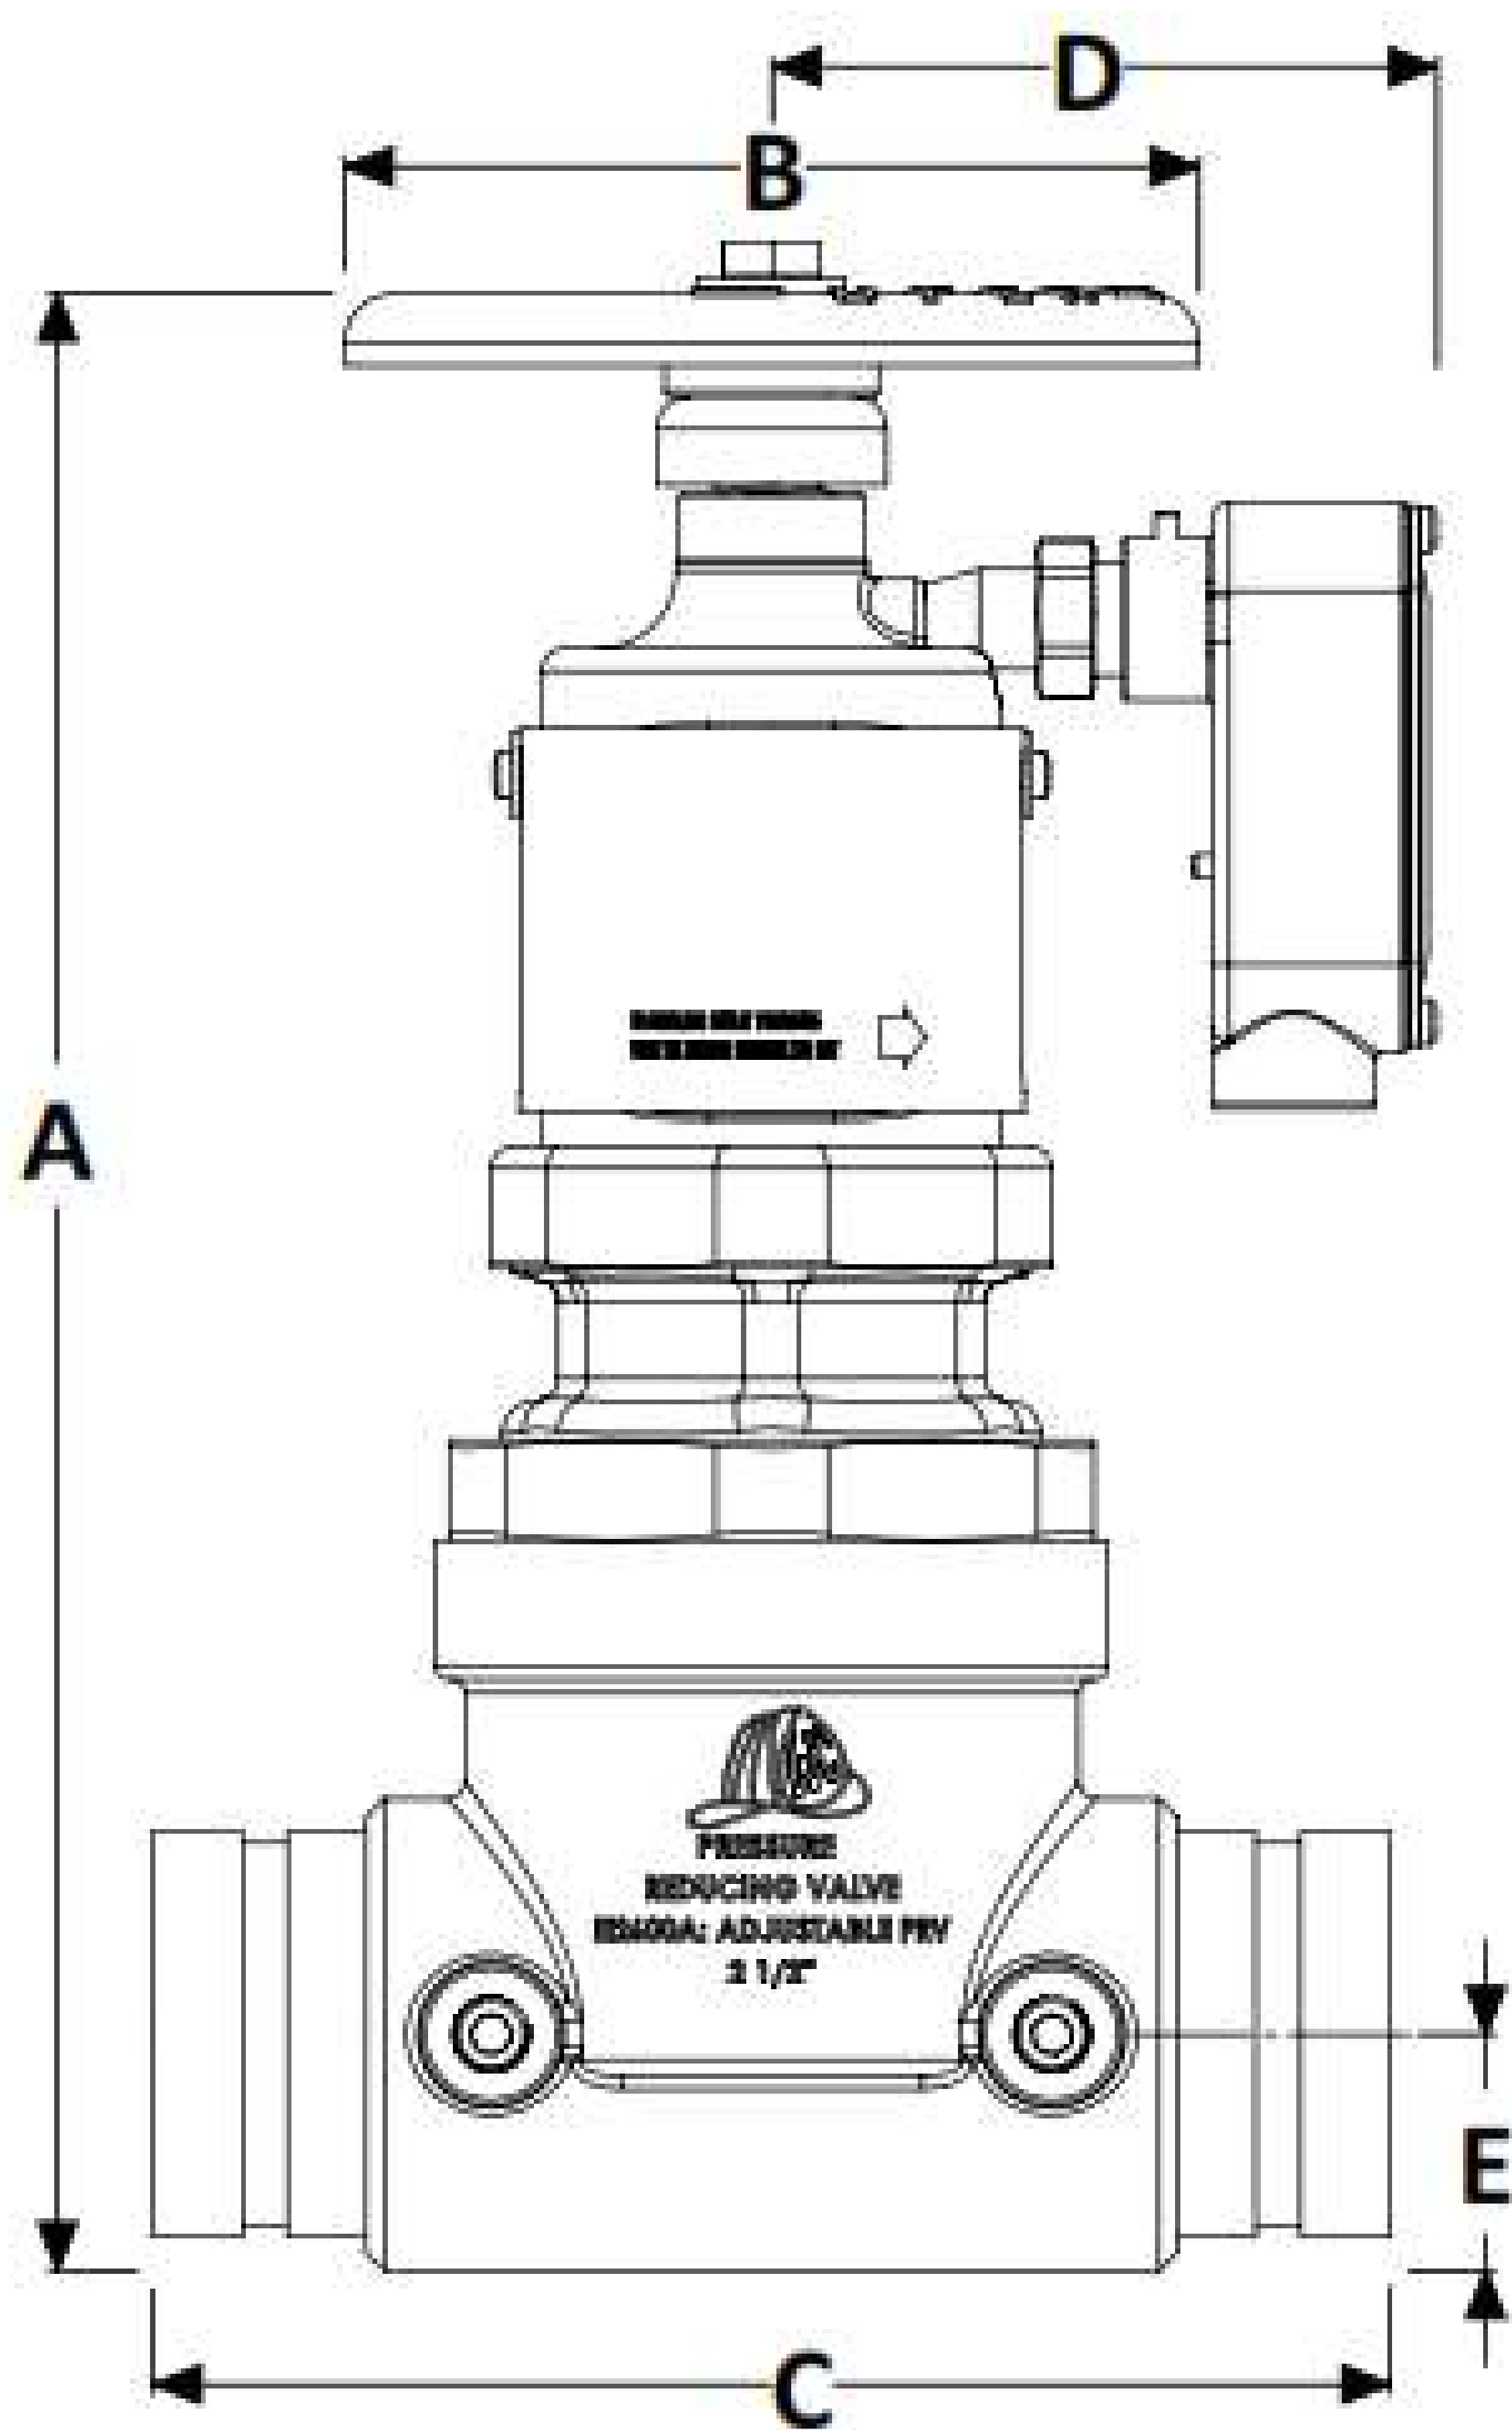

	INCH	MM
A OPEN	14	356
A CLOSED	13 1/2	342
B	6	152
C	8 11/16	221
D	4 5/8	118
E	1 5/8	42

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	